

# REPLACEMENT PARTS GUIDE

## 652R Quik-Trak™ Mower with 52 inch Side Discharge Deck

### ENGINE



#### OIL FILTER

[AM125424](#)

Change every 100 hours or Annually.



#### ENGINE OIL

[TY26669](#) (John Deere Plus-50™ 10W-30)  
(2.1 L (2.2 qt.))

Change every 100 hours or Annually.



#### AIR FILTER

[M131802](#) (PRIMARY AIR CLEANER)

Change every 300 hours.



[M131803](#) (SECONDARY AIR CLEANER)

Change every 500 hours.



#### JOHN DEERE MULTI-PURPOSE HD LITHIUM COMPLEX GREASE

[TY24416](#)

#### GREASE GUN

[TY26183](#)

Change As Required.



#### FUEL FILTER - IN - LINE

[AM116304](#) (S/N: - 080000)



[UC21217](#)

Change every 300 hours.



#### SPARK PLUG

[M805853](#)

Change every 1000 hours.



### FUEL & AIR



#### FILLER CAP

[TCU34085](#) (S/N: - 075001)

[AUC14828](#) (S/N: 075001-)



#### MUFFLER

[TCA23223](#) (S/N: - 060000)

[AUC14455](#) (S/N: 060001-)

### ELECTRICAL



#### ROTARY SWITCH

[TCA22740](#) (S/N: - 045000)



[AUC18708](#) (S/N: 045001-)



#### CONTROL LEVER THROTTLE CABLE

[AUC18415](#) (S/N: - 075000)

[AUC20360](#) (S/N: 075001-)



#### REVERSE IMPLEMENT PUSH SWITCH

[AUC11785](#)



#### IGNITION KEY

[AUC12681](#)



#### BATTERY

[TY25221B](#) (12 V)

### TRANSMISSION/ HYDRAULIC



#### HYDRAULIC OIL FILTER

[TCA23150](#)

Change every 100 hours or Annually.



#### TRACTION DRIVE BELT

[UC18232](#) (LGTH = 1301.5 mm,  
WIDTH = 12.45 mm and TK = 8 mm)

# REPLACEMENT PARTS GUIDE

## 652R Quik-Trak™ Mower with 52 inch Side Discharge Deck



### MOWER BLADE

[TCU34280](#) (CUT LENGTH = 165.1 mm)




### MULCH BLADE

[UC10725](#) (CUT LENGTH = 177.8 mm)



### MOWER DECK LEVELLING

[AM130907](#)

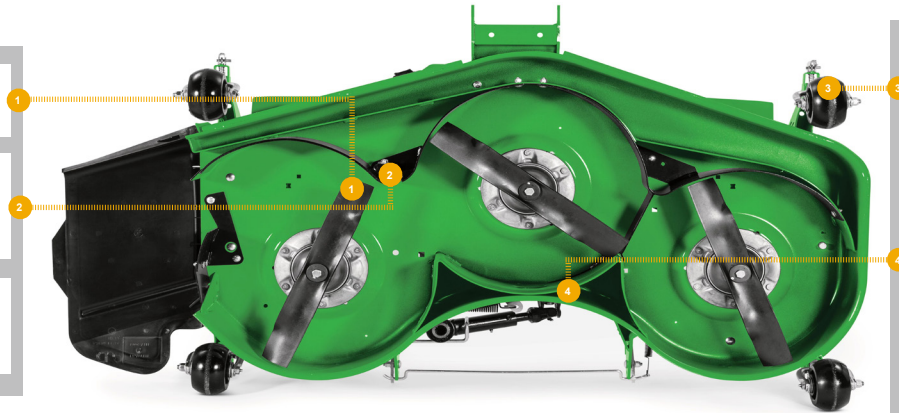

### GAUGE WHEELS

[UC28193](#)



### FLAT MOWER BELT

[TCU34219](#) (S/N: - 045000) (PRIMARY)  
(LGTH = 2134.61 mm,  
WIDTH = 16.66 mm, TK = 10.31 mm)



[UC11266](#) (S/N: 045001-) (PRIMARY)  
(LGTH = 2125 mm, WIDTH = 16 mm)



[TCU34215](#) (SECONDARY)  
(LGTH = 1169.41 mm,  
WIDTH = 16.66 mm, TK = 10.31 mm)

